

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 September 2004 (10.09.2004)

PCT

(10) International Publication Number
WO 2004/077015 A2

- (51) International Patent Classification⁷: **G01N**
- (21) International Application Number: PCT/US2004/004845
- (22) International Filing Date: 20 February 2004 (20.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/449,284 21 February 2003 (21.02.2003) US
- (71) Applicant (for all designated States except US): **MYKROLIS CORPORATION** [US/US]; 129 Concord Road, Billerica, MA 01821-7036 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SPIEGELMAN, Jeffrey, J.** [US/US]; 5289 Meadows Del Mar, San Diego, CA 92130 (US). **ALVAREZ, Daniel, Jr.** [US/US]; 10908 Black Mountain Road #1, San Diego, CA 92126 (US). **TRAM, Allan** [US/US]; 7745 Prairie Shadow Road, San Diego, CA 92126 (US).
- (74) Agents: **CARROLL, Alice, O.** et al.; Hamilton, Brook, Smith & Reynolds, P.C., 530 Virginia Road, P.O. Box 9133, Concord MA 01742-9133 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AF, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 2004/077015 A2

(54) Title: PURIFIER INFORMATION RETRIEVAL SYSTEM

(57) Abstract: The present invention relates to the monitoring of contaminant concentrations in manufacturing processes that employ fluid purification devices. The invention provides a sensitive method for analyzing contaminant concentrations in a process fluid stream using purification material to adsorb contaminants contained therein over an entire process.

B116

PURIFIER INFORMATION RETRIEVAL SYSTEM

RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application No. 5 60/449,284, filed on February 21, 2003. The entire teachings of the above application are incorporated herein by reference.

BACKGROUND OF THE INVENTION

There is an ever increasing need for high purity gases and liquids for use in 10 various chemical, medical and pharmaceutical, and manufacturing processes, specifically in microelectronics, *e.g.*, lithography, epitaxy, and thin film processing. One of the challenges facing today's high purity gas and liquid users is measuring contaminants in their process gas. Contaminants present in small amounts, such as parts-per-trillion (ppt) concentrations, can adversely affect the processes, especially 15 over long periods of chronic exposure. Contaminants may occur in impulse or random events which equipment monitoring response time or random nature prevents measurement and containment. By providing purification on line, impulse events may be smoothed and low to undetectable contaminant levels are concentrated in a purifier.

20 At the ppt and sub-ppt levels of contamination, continuous process monitoring is not feasible with current analytical methods and technologies. Direct injection methods may be imprecise, inaccurate, or cost prohibitive. An example of direct injection method capable of continuous contaminant monitoring is found in US 6,547,861, which describes an APIMS detection method capable of reaching 25 ppt. 25 See, US Patent Nos. 6,550,308, 6,397,660, 6,418,781 and 5,304,796. However, this

- 2 -

system is large, expensive, and requires a skilled analytical chemist or technician to operate. Concentration methods are often employed to monitor contaminants over longer time periods. This method involves placing a concentration device, such as a thermal desorption tube (TDT), into contact with the process fluid. After a certain

5 time period the TDT is removed from the process and sent to an analytical lab for testing. While the TDT method provides low cost analysis of chronic contamination in a process, it suffers from many drawbacks. TDTs are normally specific to a certain class of contaminants, usually hydrocarbons, and often suffer from low contaminant capacities, reducing sampling times and requiring frequent replacement. TDTs do not

10 generally meet the efficiency and capacity requirements of purifiers. TDTs are often incompatible with ultra-high purity (UHP) fluid delivery systems. TDTs are not required elements of fluid delivery systems and, thus, increase the cost and complexity of any fluid delivery system. When installed parallel to the process fluid delivery line, TDTs bleed gas from the process, thus increasing gas use and requiring

15 adequate venting. TDTs are easily cross-contaminated during installation and removal from process fluid lines. The trapping efficiencies of many TDTs are not very high, resulting in lower detection limits of 100 ppt.

There are many possible sources of contamination during industrial processes. Source gases and liquids may contain contaminants. System leaks can generate

20 environmental contaminants. Off-gassing and permeability of tool materials, mainly plastics but also ceramics and stainless steel can be a source of system contamination. Contaminants may arise from the by-products of reactions in the delivery path or UV light induced reactions, *e.g.*, in photolithography. Such potential contaminant sources

- 3 -

and their effects on the manufacturing process provide impetus for using point-of-use (POU) purifiers.

Examples of POU purifiers include inorganic adsorbents, including zeolites, silica, alumina and transition metal-based adsorbents; palladium cells; organic
5 polymers, which can be imbedded with adsorbent materials; and others known to those skilled in the art. Exemplary POU purifiers are those taught in US patents 6,391,090; 6,361,696; 6,241,955; and 6,059,859. The POU purifier selected depends on the source of the gas or liquid to be passed through the purifier and the sources of contaminants typically present in the process. Specific contamination issues may vary
10 broadly between gases and liquids, as well as between different classes of gases or liquids. For example, light hydrocarbons (LHC) generally come from impure source gases. Nitrogenous contamination, moisture and organic solvent vapors are generally present in cleanrooms, but may be condensed on surfaces or dissolved in source liquids. Heavy hydrocarbons and refractory compounds (*e.g.*, siloxanes) generally
15 come from plastics, lubricants, and seals used in tools. Oxygen (O₂) and carbon dioxide (CO₂) typically come from the environment, i.e. leaks in the fluid delivery system. As different contaminants tend to arise from different points in a process, examining contaminants adsorbed by purifiers indicates sources of contamination in a process. The information generated by such an analysis can be used to improve
20 process control. Identification of contamination sources allows for the isolation of the step to determine the effects on the process.

While many purifiers remove contaminants, in most cases the contaminant molecules are destroyed or otherwise modified as they are removed. Therein the contaminant molecules cannot be released from the purifier material or are not

- 4 -

released in a discernible form or reproducible concentration. If all hydrocarbon contaminants are converted into carbon dioxide and water or if all sulfur-containing contaminants are released as SO₂ or H₂S, the true nature of the contaminant as it was adsorbed by the purifier material is indiscernible. For example, non-evaporable
5 getters are thought to adsorb nitrogen to form metal nitrides, oxygen to form metal oxides, hydrogen to form metal hydrides, and hydrocarbons to form metal carbides, each of which can migrate from the surface into the bulk of the getter alloy. In this case the contaminant species cannot be desorbed from the purifier in a chemical state identical to that found in the gas or liquid stream. Furthermore, probably as a result of
10 the solid state diffusion process that occurs in these and many other purifier materials, desorption of the contaminants from the purifier material, even as a chemical relative of the original contaminant species, requires high temperatures, is inaccurate, and involves hazardous conditions.

15 SUMMARY OF THE INVENTION

The present invention relates to the monitoring of contaminants occurring in manufacturing processes that employ fluid purification devices. More specifically, the present invention provides a sensitive method for analyzing the contaminant concentrations in manufacturing processes that employ gas or liquid purifier materials.

20 In its broadest embodiment the present invention is a method for obtaining information about the contaminants present in a process gas or liquid. In this embodiment, the method comprises passing the process fluid stream (*e.g.*, the entire volume of the fluid stream) through a purifier material to thereby adsorb contaminants onto the purifier in a manner such that the contaminants retain their integrity and/or

do not distort the concentration level of the contaminants; isolating the purifier material from the process fluid stream; desorbing the contaminants from the purifier material; and identifying the contaminants desorbed from the purifier material and determining the concentration thereof using analytical means, wherein the
5 concentration is correlated to the contaminant concentration in the entire volume of the process fluid stream

The invention provides a method for the analysis of gas or liquid purifiers used in a manufacturing process to determine contaminants removed from the gas or liquid stream by the purifier. After contact with the gas or liquid stream for a period
10 of time, the purifier is connected to an analytical instrument, *e.g.*, gas chromatography/flame ionization detector (GC/FID) or gas chromatography/mass spectrometry (GC/MS), and the purifier is subjected to conditions to desorb contaminants, *e.g.*, heating, vacuum or addition of alternative gas, to release products bound to the purifier material. Desorption may be effected in a stepwise fashion to
15 release contaminants separately. The desorption stream is analyzed to determine the contaminants present and their concentrations. Using data from a particular purifier and process conditions, information about the process may be extrapolated. The information can be used to improve process control.

The chemical or physical action of an alternative gas can be used to remove
20 the contaminants from the purifier material. In one embodiment, the alternative gas is chemically inert to the contaminant and/or the purification material. In another embodiment, the alternative gas is chemically oxidizing to the contaminant compounds and/or the purification material. In yet another embodiment, the alternative gas is chemically reducing to the contaminant compounds and/or the

purification material. In a particularly preferred embodiment, the alternative gas is hydrogen.

The present invention is a method and apparatus for the identification and quantification of contaminants removed from a process gas or liquid by the normal operation of a purifier, wherein the concentration of said contaminant is below the detection limit of analytical equipment commonly used in the manufacturing process or known to those skilled in the art. Detection limits vary by contaminant and analytical equipment varies by manufacturing process, but in this preferred embodiment the extrapolation of contaminant concentrations in the range of about 0.01-1,000 ppt, preferably 0.1-500 ppt, is possible.

In the method of the present invention, the data obtained after analyzing the desorption gas stream quantitatively reflects the contaminant concentration in the process gas or liquid. In order to obtain actual contaminant concentrations in the process gas or liquid, certain process specific information must be known. This information includes the flow rate of process gas or liquid, the total time of purifier use, and the duty cycle of the purifier. This information is commonly known by the operators of a particular manufacturing process and would, thus, readily be obtainable by those skilled in the art.

The method of the present invention requires that contaminants be desorbed from the purifier non-destructively or that they be desorbed from the purifier in a discernible form (e.g., non-destructive). For example, oxygen may be chemisorbed by a purifier material to form an oxide layer and released from the purifier material as water after reduction of the oxide layer, in which case the oxygen concentration is discernible by monitoring the water concentration in the desorption stream.

- 7 -

Furthermore, the total oxygen contaminant concentration and total water contaminant concentration may be analyzed separately by, for example, first desorbing the water under non-reducing conditions followed by reductive treatment to release chemisorbed oxygen.

5 The invention is an apparatus for the analysis of contaminants desorbed from a purifier. Such an apparatus comprises a connector with a valve or other controller to attach the purifier to the device while limiting exchange between the purifier and the apparatus; a heater and thermostat for regulating the temperature of the purifier material; a gas source and a connector with a controller to attach the gas source to the
10 apparatus while limiting exchange between the gas source and the apparatus; and an analytical instrument to detect the desorbed contaminants. The apparatus preferably contains a quantitative analytical instrument to determine the quantity of the contaminants released. Further, the apparatus may contain mass flow controllers and valves, desorption tubes and/or cold traps for collecting contaminants and a computer
15 or other logical tool that can be used for data analysis.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be better understood when consideration is given to the following detailed description thereof. Such description makes reference to the
20 annexed drawings.

FIG. 1 is a schematic diagram of the apparatus of the present invention, representing a preferred embodiment thereof.

- 8 -

FIG. 2 is a gas chromatograph of a six-component hydrocarbon mixture in air detected by flame ionization detection. The analytes were sampled with a liquid nitrogen cooled cold trap.

FIG. 3 is a gas chromatograph of a six-component hydrocarbon mixture in air thermally desorbed from a point-of-use purifier and detected by flame ionization detection.

FIG. 4 is a plot of FID response, *i.e.*, detected concentration, versus inlet concentration, calculated from the dilution levels, for varying six-component hydrocarbon mixture concentrations in air. The plot compares the calibration standard thermally desorbed from a test purifier to the same standard when the purifier is bypassed.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As the demand for higher purity gases has increased, the demand for methods of monitoring gas purification and optimization of methods to reduce contamination have increased. Increasingly sensitive methods are required for the analysis of parts-per-trillion (ppt) and sub-ppt contaminant concentrations, making detection and analysis equipment more complex and expensive. The invention is a method for the sub-0.1 ppm analysis of contaminant concentrations in high purity gases or liquids. The method comprises a purifier that removes the contaminants from a process fluid stream while on line and detection of the contaminants desorbed from the purifier while off line.

- 9 -

An advantage of the invention is that the method can be used to monitor a process fluid streams that contains levels of contaminants that are normally undetectable. The invention allows one to ascertain the concentration of contaminants in a process fluid stream using integrative sampling of the contaminants (*i.e.*, all of the fluid stream passes through the purifier material) so that over time the concentration of adsorbed contaminants in the purifier reaches detectable levels; in contrast to periodic sampling where the contaminant levels are otherwise undetectable. The integrative sampling period can be over the useful life of the purifier material or over the entire life time of the process. This provides a significant advantage over the traditional use of thermal desorption tubes, where only a portion of the process fluid stream is directed through the TDT rather than the entire process fluid stream.

The invention further provides end user access to high sensitivity analysis of contaminants adsorbed by the purifier without having to purchase expensive analysis equipment. The invention may further include analysis of the manufacturing process based on the contaminants desorbed from the purifier allowing optimization of the manufacturing process.

In the method of the present invention, a purifier is installed in a fluid delivery line servicing a manufacturing process. Since purifiers are commonly installed in fluid delivery lines, especially point-of-use purifiers in lines servicing microelectronics process tools, no additional equipment or functional input is required by the end-user to practice the present invention. At a desired point in time, which may be the specified lifetime of the purifier or a specific point in a process as after a major system upset, the purifier is disconnected from the manufacturing process. This may be accomplished by physical deinstallation of the purifier from the fluid delivery

- 10 -

line or by closure of the fluid's flow through the purifier material, as in the case of assemblies of valves, mass flow controllers, and other mechanical devices. At this point the required input by the end user has been fulfilled. A desorption gas is then made to flow through the purifier and the effluents, which contain the desorbed
5 contaminants, are monitored by a suitable analytical device. Analysis and quantification of the contaminants over the process period can be made prior to regenerating the purifier material.

While the method of the present invention is not restricted by any specific mechanisms of adsorption and/or desorption, the invention requires the use of specific
10 purifier materials that remove contaminants in a discernible manner. Preferably, contaminants are removed by the purifier non-destructively, but certain other adsorption mechanisms particular to specific purifier materials would also be considered discernible according to the method of the present invention. Purifier materials that are especially suited to the method of the present invention are Gate
15 Keeper™ point-of-use purifiers available from Mykrolis Corporation, Billerica, MA. The exact adsorption/desorption mechanisms of various contaminants in combination with various types of these purifiers are unknown and speculative, but the requirement of an analytical relationship between process contaminant concentration and contaminants detected by the method of the present invention is met by these purifier
20 materials.

In one embodiment of the invention, an end user of a purifier at regular intervals or upon development of a problem, disconnects the purifier from the apparatus to which it is attached and ships it to the manufacturer or other qualified analyst to determine the contaminants in the process gas or liquid. Alternatively, the

purifier may be effectively detached from the apparatus to which it is attached by means of a bypass line. Regardless of the location of the purifier and the analysis equipment, the process for analyzing contaminant concentrations is the same.

The purifier is attached to an analytical instrument, *e.g.*, GC/FID or GC/MS, and the purifier is subjected to conditions to desorb the contaminants including, but not limited to, heating, vacuum, exposure to alternative gases or combinations thereof. The heating may be ramped or stepped to separate contaminants being desorbed separately by strength of the interaction with the adsorbent. Addition of alternative gases can be used to physically and/or chemically release products bound to the media (*e.g.*, injection of hydrogen to release oxygen adsorbed to the media as water). Methods of desorption are well known to those skilled in the art. For thermal desorption, the temperature can be increased linearly or increased in stages to a number of isothermal points.

The contaminant containing stream is analyzed to determine the contaminants present and their concentrations. Contaminants removed from the fluid stream include, but are not limited to, organic compounds (*e.g.*, C₁-C₂₀ hydrocarbons), carbon dioxide, carbon monoxide, nitrogen-containing compounds (*e.g.*, NO, NO₂, N₂O, NH₃, organic amines, or NX₃; wherein X is a halogen atom), sulfur-containing compounds (*e.g.*, SO₂, SO₃, H₂S, organic thiols or thioethers), hydride compounds (*e.g.*, BH₃, AlH₃, SiH₄, GeH₄, NH₃, PH₃, or AsH₃), hydrogen, halide compounds (*e.g.*, HF, HCl, HBr, fluorocarbons, chlorocarbons, SiF₄, SiCl₄, NF₃, SF₆, or organic halides), halogens (*e.g.*, fluorine, chlorine, bromine, iodine), metals (*e.g.*, Li, Na, K, Mg, Ca, Ba, Ti, Zr, Cr, Mo, Mn, Fe, Ni, Cu, Zn or Hg), oxygen, water, refractory compounds (*e.g.*, siloxanes, boron or phosphorus compounds), and combinations

- 12 -

thereof. A refractory compound is a compound that has the ability to effect the refraction or diffraction of light.

Contaminants may be identified by methods including, but not limited to, GC retention time, MS fragmentation pattern, and infrared (IR) spectroscopy. For analytical purposes, the contaminants may be further concentrated in the effluent stream using a desorption tube, cold trap, or other method well known to those skilled in the art. Concentration improves the detection limits of the method and provides a method for separating dissimilar contaminants.

Using the data obtained during the analysis of a particular purifier and the process conditions under which it was used, information about the process may be extrapolated. For example, mathematical algorithms may be used to relate the desorption time and temperature of a particular contaminant as a function of its known adsorption properties, thereby extrapolating information about the manner of its adsorption, *e.g.*, time or purifier coverage. This information can be used to improve process control.

Contaminants and their concentrations can be plotted as a function of their desorption temperature and time. This provides information about the process of contamination. The first contaminants desorbed are either the last adsorbed or those least tightly bound by the adsorbent. This information can be useful for process control as it may be related to a specific time in the process, *e.g.*, changing of the source gas or liquid; a tool malfunction or service, *e.g.*, temporal material replacement or service; a process step, *e.g.*, substrate change in a molecular beam epitaxy (MBE) or photolithography tool; or a conflicting process step in the facility.

- 13 -

The data obtained can be used to identify the source of the contaminant, be it input gas quality, system integrity, material out-gassing, or process-product breakdown. This information can be used to optimize the manufacturing process. Thus, the present invention is particularly suited to process analysis after a system
5 upset has occurred, *e.g.*, such noticeable defects in semiconductor wafers as film hazing or unwanted doping.

The apparatus for the analysis of contaminants desorbed from a purifier may comprise any of a number of analyzers depending on the detection levels required and the suspected contaminants based on the purifier to be analyzed and the process in
10 which it is used. Such an apparatus comprises a connector with a valve or other controller to attach the purifier to the device while limiting exchange between the purifier and the apparatus; a heater and thermostat for regulating the temperature of the purifier material; a gas source and a connector with a controller to attach the gas source to the apparatus while limiting exchange between the gas source and the
15 apparatus; and an analytical instrument to detect the desorbed contaminants.

The apparatus preferably contains a quantitative analytical instrument to determine the quantity of the contaminants released. An example of a preferred instrument is a GC/APIMS (atmospheric pressure ionization mass spectrometer) which can separate contaminants according to their boiling points, identify them
20 according to their masses and fragmentation patterns and quantify them by their peak intensities. Currently available GC/APIMS instruments are capable of reaching detection limits of 20 ppt. Less complex analytical tools may also be used to determine total organic content (TOC), total sulfur content (TSC), moisture detectors,

- 14 -

and infrared spectrometers. The selection of the detection instrument or instruments is a matter of choice. Such selections are routine for those skilled in the art.

The apparatus may contain mass flow controllers and valves, desorption tubes and/or cold traps for collecting contaminants, and a computer or other logical tool that
5 can be used for data analysis. Software including algorithms for extrapolating process information from the desorption data may be used to analyze the results of the desorption.

In the preferred embodiment shown in FIG. 1, a number of these components are used in the analysis of a purifier. The desorption gas, air, enters the apparatus
10 through pressure regulator 2 and is purified to < 1 ppt hydrocarbon contaminants by purifier 4. While this purification step is optional, it is desirable to use a desorption gas of the highest possible purity, because background contamination can interfere with the analysis and limit detection. A known gas standard enters the apparatus through pressure regulator 6. The two gas streams are combined in double dilution
15 manifold 12, comprising MFC2 8, MFC1 14, valve 16, pressure gauge 18, back pressure regulator 20, MFC3 22, valve 24, and MFC4 26. The double dilution manifold is optional, but often is required by limitations in available gas standards and mass flow controller operating parameters. The gas is then sent through valve 30, while bypass loop 32 containing test purifier 34 is isolated by closing valves 28 and
20 36. The gas enters collection device 38 through valve 46, which is preferably a cold trap but may also be a TDT or similar device, and is vented through rotameter 50. Pressure gauge 52 and back pressure regulator 54 allow for venting of excess gas not going through the cold trap during sample collection. After a certain collection period, gas is released from collection device 38 and flows through valves 40 and 42

- 15 -

to quantitative analytical device 44, which is preferably a gas chromatograph fitted with a suitable detector, *e.g.*, FID for hydrocarbons, PFPD for inorganics, or MS for atmospheric or any contaminants.

After calibration of the analytical device, which is not a necessary step of the method but is preferable under ideal test conditions, valves 28 and 36 are opened, valve 30 is closed, and test purifier 34 is exposed to the desorption gas. As stated desorption may be accomplished in a number of ways. This preferred embodiment favors isothermal desorption, wherein 34 is heated by heating element 48 to a desired temperature at which all effluents are collected. Another embodiment using the apparatus of FIG. 1 employs ramped thermal desorption, wherein the temperature of 34 is increased by 48, *e.g.*, linearly, exponentially, or step-wise, over time and different effluents fractions are collected at different times in the desorption process. Another embodiment that requires modification of the apparatus of FIG. 1 involves the use of an alternative gas to assist in the desorption of contaminants. One slight modification comprised by this embodiment is the substitution of hydrogen for air as the desorption gas. The effluent of 34 flows through 36 and 46 and enters 38, which is preferably a cold trap but may also be a TDT or similar device. After a certain collection period, gas is released from 38 and flows through 40 and 42 to 44, which is preferably a gas chromatograph fitted with a suitable detector, *e.g.*, FID for hydrocarbons, PFPD for inorganics, or MS for atmospheric or any contaminants.

FIGs. 2-4 show data obtained using the apparatus of FIG. 1. FIG. 2 is a gas chromatograph of a 10 ppm six-component (benzene, toluene, ethyl benzene, *ortho*-, *meta*-, and *para*-xylene) diluted to 1 ppt and analyzed by the cold trap/GC/FID method. FIG. 3 plots 1 ppb six-component hydrocarbon gas standard desorbed from

- 16 -

the test purifier after a 25 minute purification cycle, during which all hydrocarbons were removed to < 1 ppt outlet purity, and a 5 minute desorption cycle with air at 300 °C. Trace 60 is the 100 ppt hydrocarbon mixture directly sampled by the cold trap/GC/FID method when the test purifier is bypassed. Trace 62 is the same mixture
5 desorbed from the test purifier and analyzed by the cold trap/GC/FID method. The test purifier non-destructively desorbs all of the contaminants originally removed from the test process gas stream. If longer desorption time or higher temperature were used, quantitative desorption could be effected. FIG. 4 is a plot of total inlet exposure of the test purifier to the same six-component hydrocarbon mixture and the
10 total desorbed contaminants after a 5 minute exposure to desorbing gas at 300 °C. It can be seen from the combination of FIGs. 2-4 that hydrocarbon analysis according to the method of the present invention is easily accomplished with very low detection limits and, by extrapolation, extremely low contaminant detection in a process gas or liquid stream, either chronic or impulsive. The differentiation between chronic and
15 impulsive contamination requires knowledge of the particular process and, sometimes, a history of the particular fluid delivery system. However, even without this information the method provides contaminant information that would otherwise be inaccessible using prior art methods.

While this invention has been particularly shown and described with reference
20 to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details can be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

- 17 -

We claim:

1. A method for analyzing contaminant concentrations in a process fluid stream, comprising:
 - a) passing the entire process fluid stream through a purifier material
5 to thereby adsorb contaminants onto the purifier material; isolating the purifier material from the process fluid stream;
 - b) isolating the purifier material from the process fluid stream;
 - c) desorbing the contaminants from the purifier material; and
 - d) identifying the contaminants desorbed from the purifier material
10 and determining the concentration thereof, wherein the concentration is correlated to the contaminant concentration in the entire volume of the process fluid stream.
2. The method of claim 1 wherein the purifier material non-destructively removes the contaminants.
- 15 3. The method of claim 1 wherein the purifier material destructively removes the contaminants, but the original contaminant species is discernible by desorption.
4. The method of claim 1 wherein the contaminants removed from the fluid
20 process stream are selected from the group consisting of organic compounds, carbon dioxide, carbon monoxide, nitrogen-containing compounds, sulfur-containing compounds, hydride compounds, hydrogen, halide compounds, halogens, metals, oxygen, water, refractory compounds, and combinations thereof.

- 18 -

5. The method of claim 4 wherein the organic compounds comprise C₁-C₂₀ hydrocarbons.
6. The method of claim 4 wherein the nitrogen-containing compounds comprise NO, NO₂, N₂O, NH₃, organic amines, or NX₃; wherein X is a
5 halogen atom.
7. The method of claim 4 wherein the sulfur-containing compounds comprise SO₂, SO₃, H₂S, organic thiols or thioethers.
8. The method of claim 4 wherein the hydride compounds comprise BH₃, AlH₃, SiH₄, GeH₄, NH₃, PH₃, or AsH₃.
- 10 9. The method of claim 4 wherein the halide compounds comprise HF, HCl, HBr, fluorocarbons, chlorocarbons, SiF₄, SiCl₄, NF₃, SF₆, or organic halides.
10. The method of claim 4 wherein the metals comprise Li, Na, K, Mg, Ca, Ba, Ti, Zr, Cr, Mo, Mn, Fe, Ni, Cu, Zn or Hg.
- 15 11. The method of claim 4 wherein the refractory compounds comprise siloxanes, boron or phosphorus compounds.
12. The method of claim 1 wherein desorption of the contaminants comprises thermal desorption, use of an alternative gas, or combinations thereof.
13. The method of claim 12 using isothermal desorption.
- 20 14. The method of claim 12 wherein the temperature of the thermal desorption is linearly increased.
15. The method of claim 12 wherein the temperature of the thermal desorption is increased in stages to a number of isothermal points.

16. The method of claim 12 wherein the alternative gas is chemically inert to the contaminant compounds and/or purification material.
17. The method of claim 12 wherein the alternative gas is chemically oxidizing to the contaminant compounds and/or purification material.
- 5 18. The method of claim 12 wherein the alternative gas is chemically reducing to the contaminant compounds and/or purification material.
19. The method of claim 12 wherein the alternative gas is hydrogen.
20. The method of claim 12 wherein certain contaminants are first removed from the purification material by thermal desorption and other
10 contaminants are second removed from the purification material by the chemical or physical action of an alternative gas.
21. The method of claim 1 wherein detecting the contaminants comprises GC/FID, GC/MS, or GC/APIMS.
22. A method for determining the historic contaminant concentration in a
15 process gas or liquid after the gas or liquid has been in contact with a non-destructive purifier material, wherein the original contaminant concentration in the gas or liquid was below the detection limit of an on line analytical device, whereby the contaminants are removed from the purifier material in a non-destructive manner and measured by analysis of
20 the effluent gas stream.
23. The method of claim 22 wherein the original contaminant concentration is about 10 ppb, preferably about 5 ppb, more preferably about 1 ppb.

24. The method of claim 22 wherein the original contaminant concentration is less than about 1 ppb, preferably less than about 0.1 ppb, more preferably less than about 0.01 ppb.
25. The method of claim 22 wherein the contaminants are removed from the purification materials by thermal desorption.
- 5
26. The method of claim 25 wherein the thermal desorption is isothermal desorption.
27. The method of claim 25 wherein the temperature of the thermal desorption is linearly increased.
- 10
28. The method of claim 25 wherein the temperature of the thermal desorption is increased in stages to a number of isothermal points.
29. The method of claim 22 wherein the removing step further comprises the use of a chemical or physical action of an alternative gas.
30. The method of claim 29 wherein the alternative gas is chemically inert to the contaminant compounds and/or purification material.
- 15
31. The method of claim 29 wherein the alternative gas is chemically oxidizing to the contaminant compounds and/or purification material.
32. The method of claim 29 wherein the alternative gas is chemically reducing to the contaminant compounds and/or purification material.
- 20
33. The method of claim 32 wherein the alternative gas is hydrogen.
34. The method of claim 22 wherein certain contaminants are first removed from the purification material by thermal desorption and other contaminants are second removed from the purification material by the chemical or physical action of an alternative gas.

- 21 -

35. The method of claim 22 wherein the analysis comprises GC/FID, GC/MS,
or GC/APIMS.

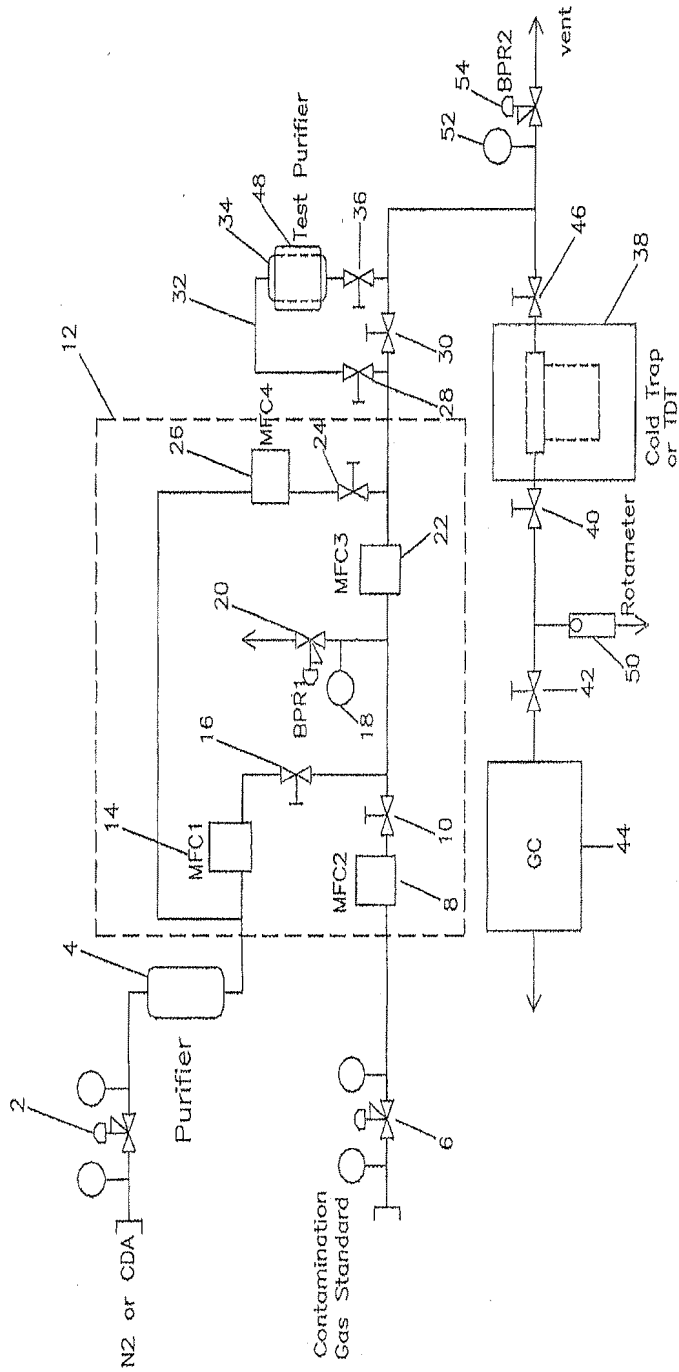


FIG. 1

2/4

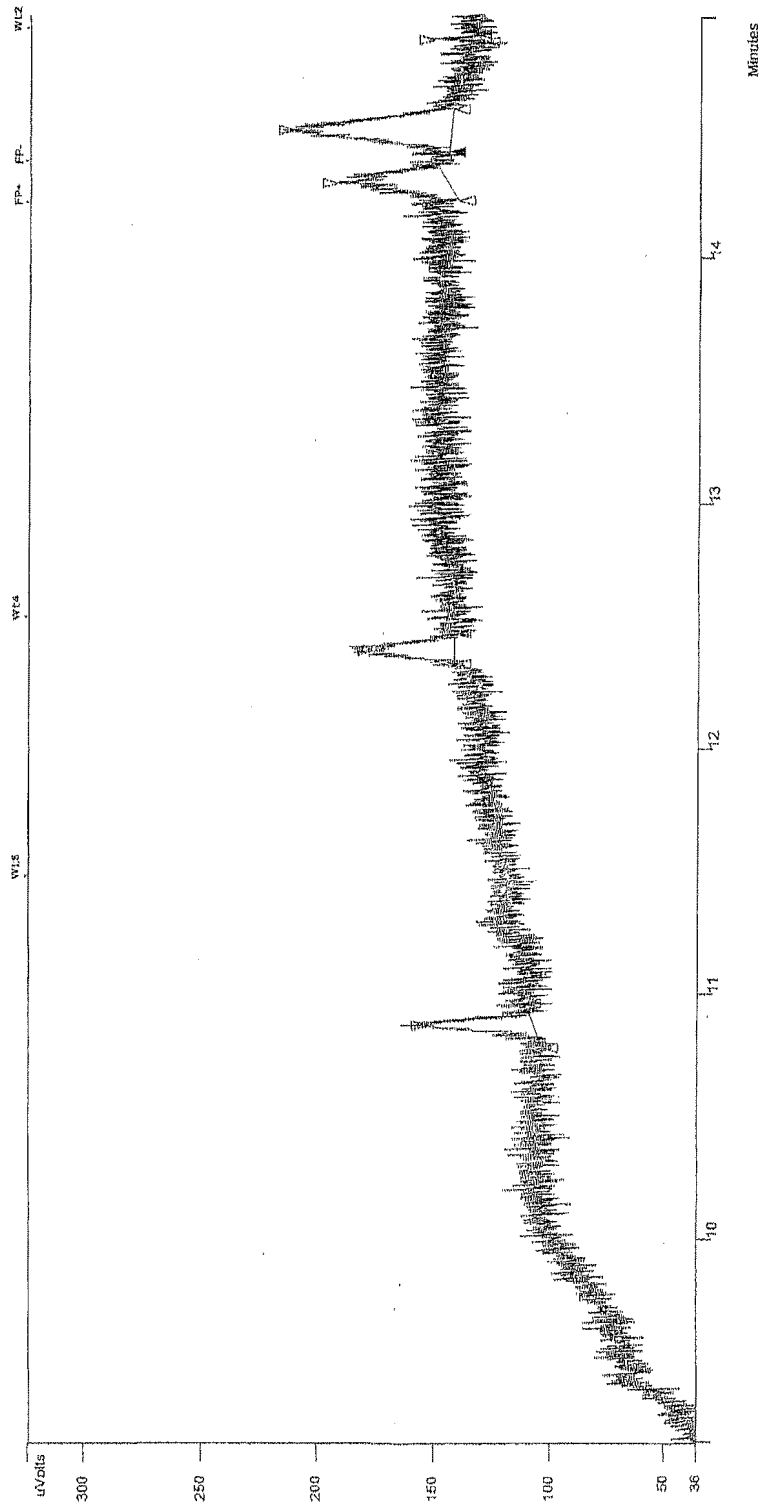


FIG. 2

3/4

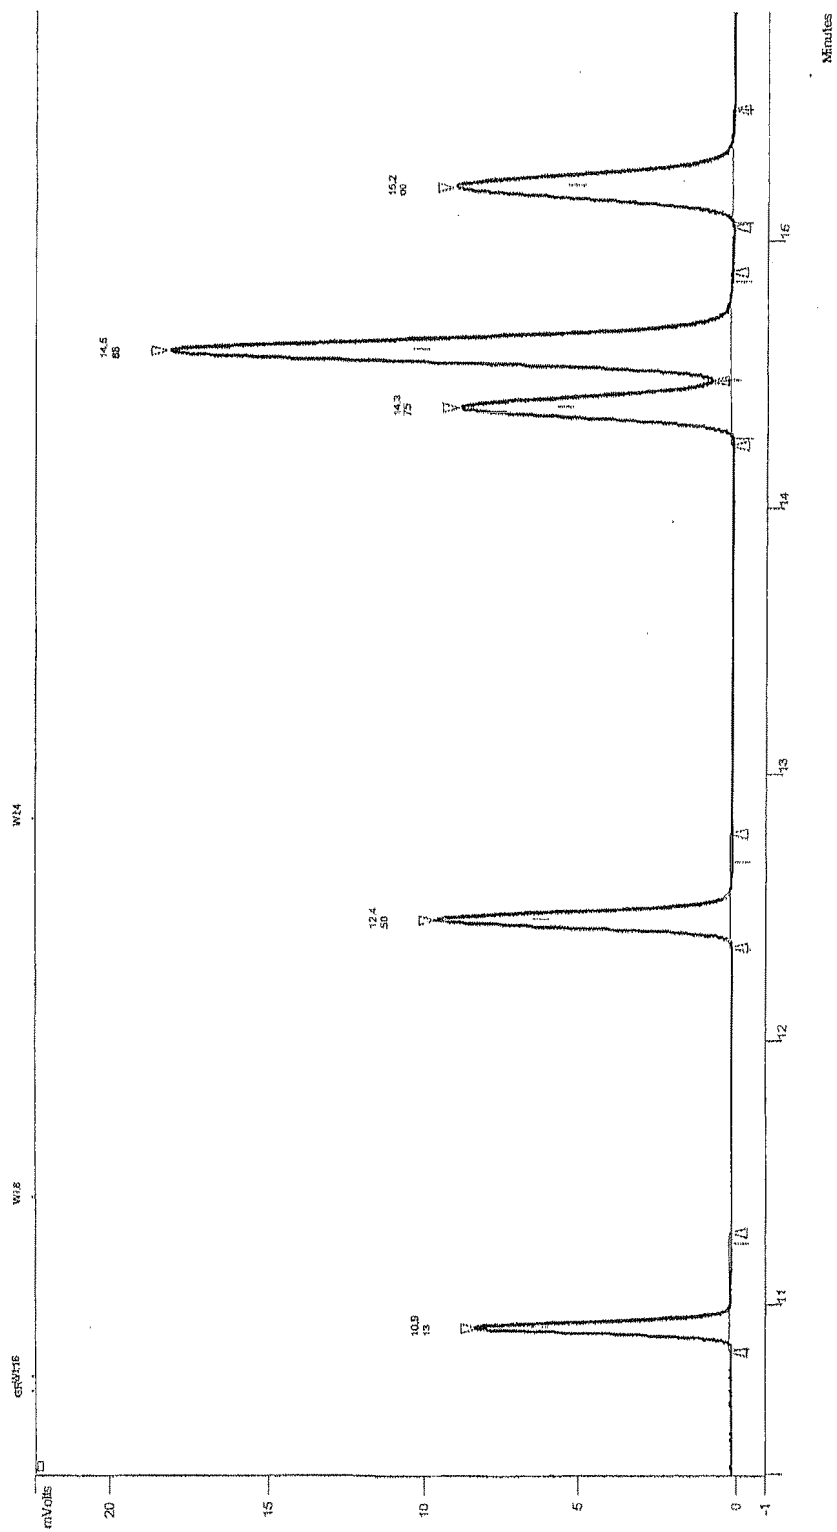


FIG. 3

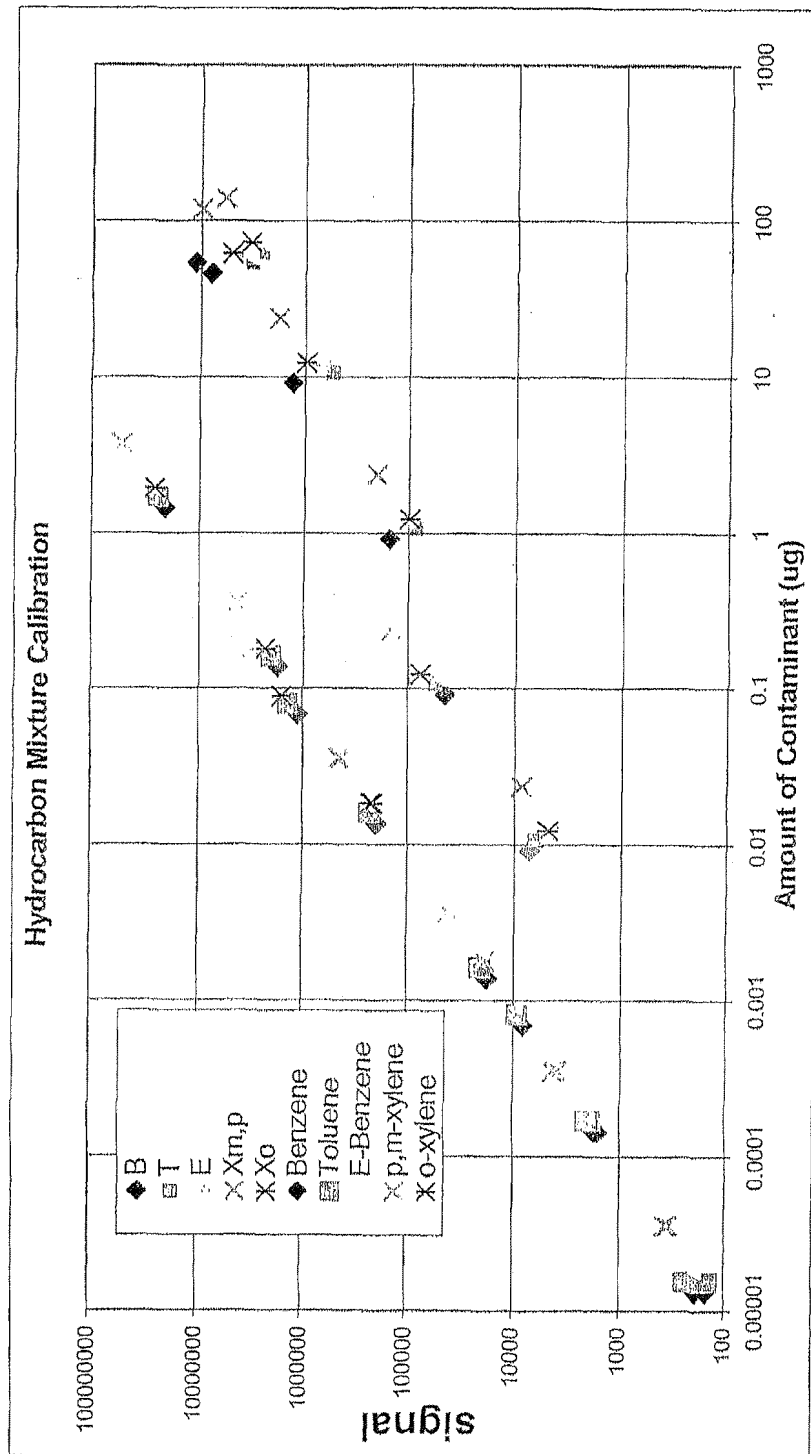


FIG. 4